

**QC-952/954/956/958(300~2000kN)****Computerized Hydraulic universal Testing Machine****Standard**

ISO 7500-1, JIG475-88 , ASTM E4 , ASTM A370 , DIN5122 , JIS B7721/B7733 , EN 10002-1,EN 1002-2,BS1610,GB/T:

Industry

Metal, Composite, construction material, Wood, Concrete, Wire and Cable



*The protective cover and the PC are optional.

Description

This series is capable of tests with higher capacity. Tests conform to standards such as ASTM, ISO, JIS, GB. The hydraulic control offers constant stress, strain and speed. Its rigid and solid structure stabilizes the test and reduces corrosion. Standard accessories are tensile and compression grips, suitable for metal,


Specification

Model	QC-958	QC-956	QC-954	QC-952
Max. capacity	300 kN	500 kN	1000 kN	2000 kN
Units	Force: gf, kgf, lbf, N, kN, ozf, tonf(SI), ton(long), tonf(short)			
Force resolution	31 bits			
Force Precision	1/100,000			
Stroke resolution	0.01mm			
Piston stroke	200 mm	250 mm	250 mm	250 mm
Space between columns	440 mm	565 mm	620 mm	675 mm
Speed range	0.5~50 mm/min			
Speed precision	±2%			
Maximum distance between tensile grips	620 mm	700 mm	710 mm	1000 mm
Thickness of flat specimens	0~20 mm	0~30 mm	0~40 mm	0~50mm
Diameter of circle specimens	6~32 mm	10~40 mm	15~60 mm	20~70 mm
Maximum distance between compression platens	580 mm	670 mm	680 mm	850 mm
Compression platen size	Ø235 mm	Ø235 mm	Ø235 mm	Ø235 mm
PC-Port	RJ45(TCP/IP)			
Motor type	Servo hydraulic control			
Power supply	3 phases 220 VAC or optional 3 phases 380V			
Dimension (mm)	680x520x2040	880x600x2240	950x700x2480	1100x800x2900
Electrical cabinet (mm)	850x700x900	850x700x900	850x700x900	850x700x900
Weight	1300 kg	2800 kg	3500 kg	7000 kg
Weight of electrical cabinet	Around 220 kg	Around 220 kg	Around 250 kg	Around 280 kg


Accessories

Standard Accessories

Tensile Grips



V face





Flat face

Software function

- Data sample rate faster can be set up to 1200 Hz.
- Operation method: By keyboard and mouse control test, can also through up and down button to adjust the fixture position.
- Software has multi-languages with Chinese, English display.
- Operating mode: TCP / IP interface, two-way transmission, the computer directly control the machine action.
- Compatible with Window 8/10 system.
- Can import multiple test data display simultaneously.
- Unit selection can be Metric unit and Imperial units.
- Form flexibility, self-planning information analysis.
- Test Screen can be selected data display, graphic display or simultaneous display.
- Graph X-Y axis physical quantity adjustment, graph-specific mark, interval mark, slope and son on.
- Data name can be self-set and can self-defined formula.
- Test tensile, compression, bending, creep, and other tests.
- Data processing: store, call, list, statistical comparison, etc.
- Variety of test actions, ex. creep, constant tensile (compression)...
- Support multiple sets of I / O signals, increase testing mechanism.
- Modularization of specimen setting, providing easy to set specimen.
- Software protection: overload, over -displacement, over-time protection.
- Key data capture, can set the upper and lower limits of test data specifications.
- Modularization of test conditions to reduce artificial setting negligence and error.



Software

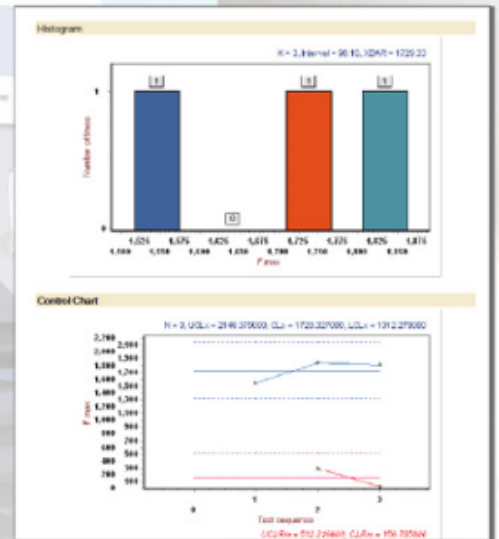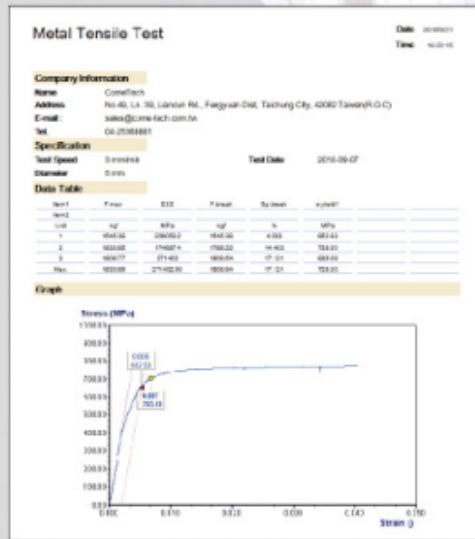

*Cometech reserves the right to modify specification of the product.

COMETECH TESTING MACHINES CO,LTD.

No.49, Ln,39, Lianucn Rd, Fengyuan Dist, Taichung City420, Taiwan

Tel:886-4-25368881 / Fax:886-4-25368883

E-mail: sales@come-tech.com.tw

URL: <http://www.come-tech.com.tw>

